



The new degree of comfort.™




Residential Electric  
Professional Classic™ Water Heaters

## Professional Classic™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

### Efficiency

- Standby watts loss 61 - 97
- Isolated tank design reduces conductive heat loss
- Resistored copper upper element and resistored Lifeguard™ stainless steel lower element to prolong anode rod and tank life



### Performance

- FHR: 42 - 99 US gallons, based on gallon capacity
- Recovery rate is 21 US gallons at a 90 degree Fahrenheit rise\*\*

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature


### Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year ProtectionPlus™ – order part number SP20904 (6 pack only)
- With ProtectionPlus™ the 6-year limited tank warranty becomes 8-year ProtectionPlus™ – order part number SP20081 (6 pack only)

\*See Residential Warranty Certificate for complete information

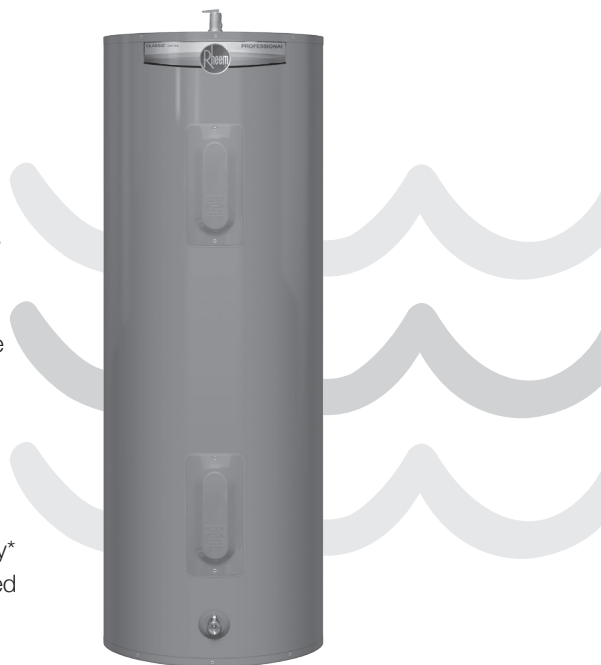

### Professional Classic™

30 to 60-Imperial Gallon  
Capacities

120 and 240 Volt AC/Single Phase  
Double Element Models  
Electric



*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com

See dimensions chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™




Residential Electric  
Professional *Classic*™ Water Heaters

| DESCRIPTION         |              |            |        | FEATURES   |          |       |                  |       |          |       |                | ROUGHING IN DIMENSIONS  |                              |                        |    |                    |
|---------------------|--------------|------------|--------|------------|----------|-------|------------------|-------|----------|-------|----------------|-------------------------|------------------------------|------------------------|----|--------------------|
| MODEL NUMBER        | STORAGE CAP. |            |        | ELEM. QTY. | 120 VOLT |       | HEATING ELEMENTS |       | 240 VOLT |       | HEIGHT (IN.) A | OUTSIDE DIAMETER (IN) B | HEIGHT TO DRAIN VALVE (IN) C | ESTIMATED SHIP. WEIGHT |    | STANDBY WATTS LOSS |
|                     | USG          | IMP. GALS. | LITRES |            | WATT.    | AMPS. | 208 VOLT WATT.   | AMPS. | WATT.    | AMPS. |                |                         |                              | LBS.                   | KG |                    |
| <b>TOP INLET</b>    |              |            |        |            |          |       |                  |       |          |       |                |                         |                              |                        |    |                    |
| PROE30 S2 CN62      | 36           | 30         | 143    | 2          | 1500     | 12.5  | 2250             | 10.8  | 3000     | 12.5  | 46-1/2         | 19-3/4                  | 3-1/2                        | 105                    | 48 | 62                 |
| PROE40 M2 CN69      | 45           | 39         | 178    | 2          | N/A      | N/A   | 2250             | 10.8  | 3000     | 12.5  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 69                 |
| PROE40 M2 CN66      | 45           | 39         | 178    | 2          | 1500     | 12.5  | 2250             | 10.8  | 3000     | 12.5  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 66                 |
| PROE40 M2 CN61†     | 45           | 39         | 178    | 2          | N/A      | N/A   | N/A              | N/A   | 3000     | 12.5  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 61                 |
| PROE40 M2 CN61†     | 45           | 39         | 178    | 2          | N/A      | N/A   | N/A              | N/A   | 3800     | 18.8  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 61                 |
| PROE40 M2 CN61†     | 45           | 39         | 178    | 2          | N/A      | N/A   | 4500             | 21.6  | 6000     | 25    | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 61                 |
| PROE40 M2 CN56†     | 45           | 39         | 178    | 2          | N/A      | N/A   | 2250             | 10.8  | 3000     | 12.5  | 46             | 24-1/4                  | 3-1/2                        | 134                    | 61 | 56                 |
| PROE60 T2 CN87      | 72           | 63         | 285    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 59             | 23                      | 3-1/2                        | 177                    | 80 | 87                 |
| PROE60 T2 CN90      | 72           | 63         | 285    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 59             | 23                      | 3-1/2                        | 177                    | 80 | 90                 |
| PROE60 T2 CN77†     | 72           | 63         | 285    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 59             | 24-1/2                  | 3-1/2                        | 188                    | 85 | 77                 |
| PROE60 T2 CN80†     | 72           | 63         | 285    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 59.55          | 23-3/4                  | 3-1/2                        | 176                    | 80 | 80                 |
| <b>BOTTOM INLET</b> |              |            |        |            |          |       |                  |       |          |       |                |                         |                              |                        |    |                    |
| PROE30 S2 CN64†     | 36           | 30         | 143    | 2          | 1500     | 12.5  | N/A              | N/A   | 3000     | 12.5  | 46-1/2         | 19-3/4                  | 3-1/2                        | 105                    | 48 | 64                 |
| PROE40 M2 CN70†     | 45           | 39         | 178    | 2          | N/A      | N/A   | 2250             | 10.8  | 3000     | 12.5  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 70                 |
| PROE40 M2 CN70†     | 45           | 39         | 178    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 46             | 21-3/4                  | 3-1/2                        | 117                    | 53 | 70                 |
| PROE60 T2 CN97†     | 72           | 63         | 285    | 2          | N/A      | N/A   | 3380             | 16.3  | 4500     | 18.8  | 58             | 23                      | 3-1/2                        | 174                    | 79 | 97                 |

- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- All models equipped with heat traps. N
- † Complies with ON/BC/QC energy efficiency requirements. ON/BC/QC 40 imperial gallon top inlet models will have side T&P.

\*\*Recovery = wattage/2.42 x temp. rise °F.  
Example: 4500W = 21 GPH  
2.42 x 90°

\*\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

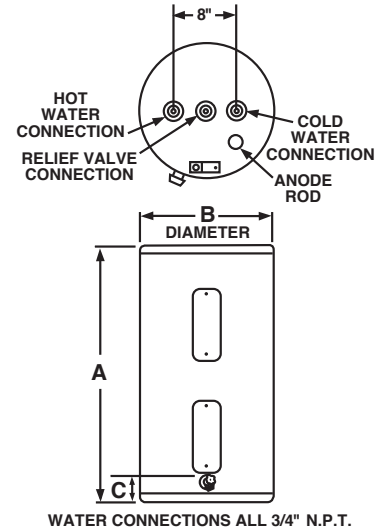

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT